


K6FG10TT

GAS FRYER DOUBLE TANK

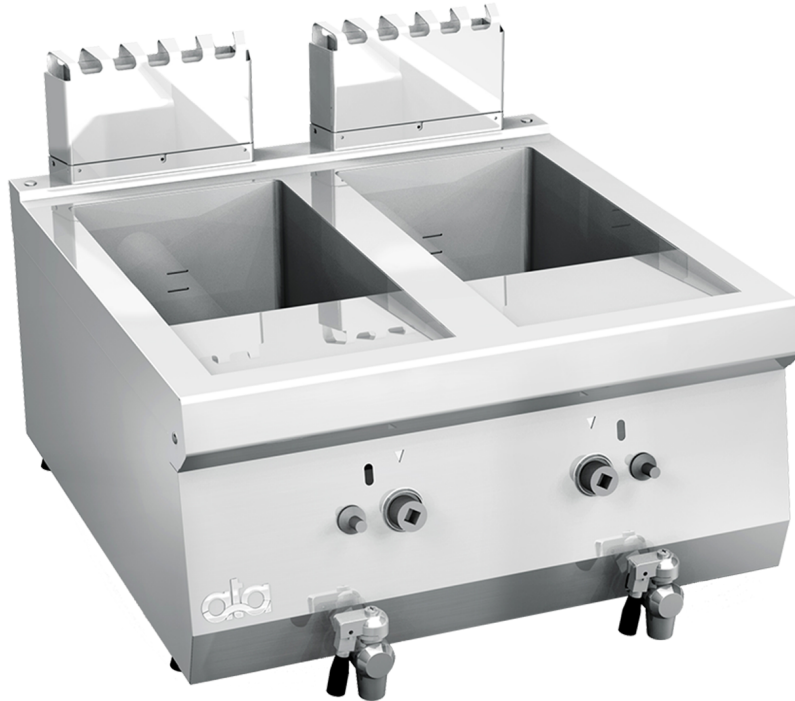

PRODUCT DESCRIPTION

Stainless steel frame. Athermic thermoset plastic knobs.

Oil heating obtained through a series of **stainless steel burners provided with finned heat heat exchanger** in the tank.

Tank with a capacity of 8 lt. and provided with a safety gas cock, which enables the temperature to be regulated between 100°C and 190°C. Safety ensured by a thermocouple kept active by the flame of the pilot burner and by a manually-reactivating safety thermostat.

Stainless steel tank with rounded edges sloping towards the drain spout.

Drain valve provided by a athermic thermoset plastic handle and a safety closing system, situated on the front of the appliance.

Standard equipped with **baskets** of steel covered by protective material.

Tested with natural gas or LPG, according to the user's needs.

Accessories available on demand.



TECHNICAL SPECIFICATIONS

Width: 600 mm
Depth: 600 mm
Height: 280 mm
Weight: 36 kg
Volume: 0.31 m³
Gas power: 12.80 kW

